

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

REVISED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)


PCT

(10) International Publication Number
WO 2004/020059 A1

- (51) International Patent Classification⁷: A63C 17/00 (74) Agent: GARDNER, John, R, G.; Suite 398, 15 Albert Avenue, Broadbeach, Gold Coast, QLD 4218 (AU).
- (21) International Application Number: PCT/AU2003/001092 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 28 August 2003 (28.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 10/234,016 29 August 2002 (29.08.2002) US (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 10/234,016 (CIP)
Filed on 29 August 2002 (29.08.2002)
- (71) Applicant and
(72) Inventor: LUKOSZEK, Benjamin, Shane, [AU/AU]; 18 Wayville Place, Robina, Gold Coast, QLD 4226 (AU). Published:
— with international search report

[Continued on next page]

(54) Title: TRUCK ASSEMBLIES FOR SKATEBOARDS

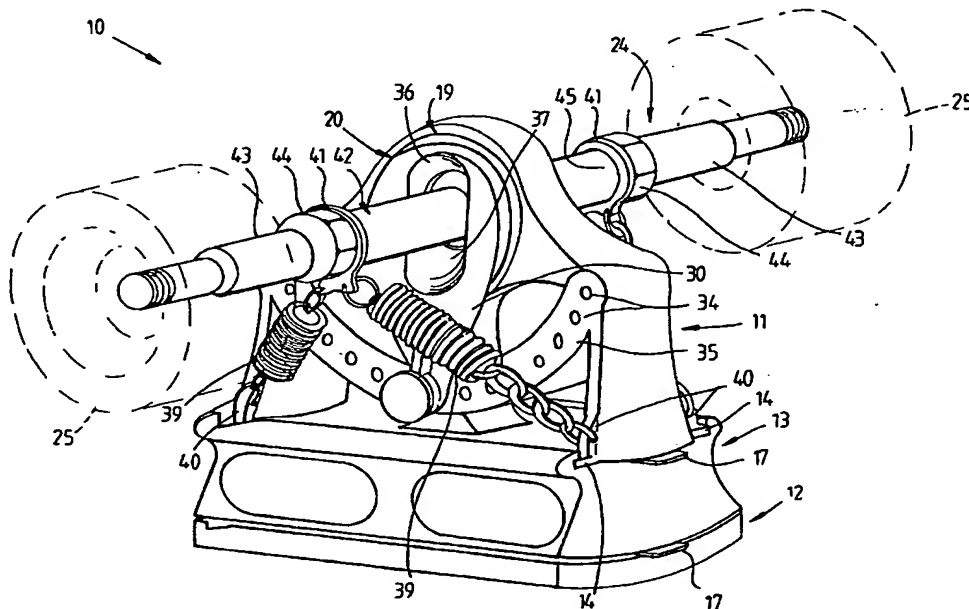

(57) **Abstract:** A skateboard truck assembly (10) having a main body (11) for mounting to the underside of a skateboard deck, an axle (24) carrying skateboard wheels (25) and mounted intermediate its opposite ends to the main body (11) via a rotatable steering adjustment body (20) for pivotal movement in a steering plane, the steering adjustment body (20) being mounted to the main body (11) for rotation about an axis extending transversely of the body (11) such that a change in the rotational position of the steering adjustment body (20) adjusts the pivot axis of the axle (24) and thus the steering characteristics of the truck assembly (10).